



MINIBIT

USER GUIDE

v1.5.1

MINIBIT.....	3
INSTALLATION.....	3
REGISTRATION.....	4
PARAMETERS.....	5
MAIN.....	5
STEP SEQUENCER.....	6
FEATURES.....	7
MIDI LEARN.....	7
RANDOMIZER.....	7
GLOBAL VOLUME BOOST.....	7
SEQUENCER STEPS.....	7
PITCH BEND RANGE.....	7
VELOCITY.....	8
PRESET COPY/PASTE.....	8
WINDOW SIZE.....	8
END.....	9
WHERE IS EVERYTHING?.....	9
CREDITS.....	9
EULA.....	9
THANK YOU.....	9

MINIBIT

[miniBit](#) is an 8-bit/chiptune style synthesizer plugin that emulates the sound of 80s game consoles and retro computers.

It features a main oscillator with 18 waveforms paired with a tunable sub oscillator (square wave). The waveforms are not band limited and will produce aliasing. Some of the waveforms were carefully created and edited with an Amiga 1200, while others were meticulously recreated from the sounds of the best classic games that we have collected over the years.

You can create all kind of noisy and retro sounds with the built-in bitcrusher, delay section and filter. You can also use the synced 8 Steps Stepper/Sequencer with multiple destinations.

From noisy, snare-like steps to ambient subs, miniBit has many uses beyond what one expects from a chip tune synth.

INSTALLATION

MAC OS


- Double click on the DMG archive to extract it
- Right click on the PKG installer and click open
- Follow the instructions to install the plug-in(s)

WINDOWS

- Extract the ZIP archive
- Double click on the setup file (.exe)
- Follow the instructions to install the plug-in(s)

REGISTRATION

In demo mode the plug-in will output silence for 3 seconds every 45 seconds, and you won't be able to save presets. While in demo mode the plugin will show the authorisation window every time you open it.

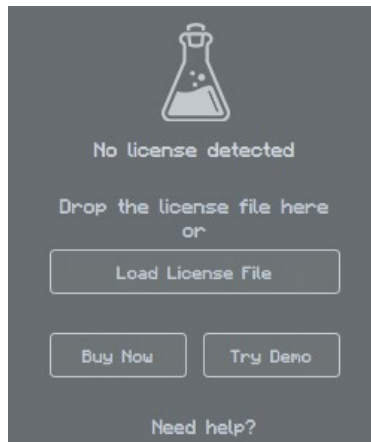

Follow these steps to authorize the plugin:

- Download the license file from your confirmation email or from [your account](#).
- Just drag and drop the license into the registration window or click on the *Load License File* button and browse to the downloaded license.

You can also open the registration window by clicking on the ☰ icon next to the bypass button, in the top-right corner.

PARAMETERS

MAIN

LFO

<i>Sync</i>	Selects the range for the Rate knob (% or synced)
<i>Rate</i>	Controls the frequency of the modulation
<i>Wave</i>	Selects the modulation waveforms
<i>Destination</i>	Destination parameter for the modulation
<i>Amount</i>	Controls the amount of modulation

ENVELOPE *Volume*

<i>Attack</i>	Controls the attack time of the volume envelope
<i>Decay</i>	Controls the decay time of the volume envelope
<i>Sustain</i>	Controls the gain value of the volume envelope
<i>Release</i>	Controls the release time of the volume envelope

ENVELOPE *Pitch*

<i>Amount</i>	Controls the amount of modulation
<i>Attack</i>	Controls the attack time of the volume envelope
<i>Decay</i>	Controls the decay time of the volume envelope
<i>Sustain</i>	Controls the gain value of the volume envelope
<i>Release</i>	Controls the release time of the volume envelope

OSCILLATOR

<i>FineTune</i>	Controls the pitch of the main oscillator in cents
<i>Tune</i>	Controls the pitch of the main oscillator in semitones
<i>Volume</i>	Controls the volume of the main waveform
<i>Waveform</i>	Selects the main oscillator waveform
<i>Sub Osc</i>	Controls the volume of the sub oscillator
<i>Sub Osc Tune</i>	Controls the pitch of the sub oscillator (-24, -12, 0)
<i>Poly</i>	Enables or disables the polyphonic mode
<i>Glide</i>	Controls the portamento between two notes

FILTER

<i>Filter Type</i>	Selects the type of filter: Low Pass or High Pass
<i>Cutoff</i>	Controls the cutoff frequency of the filter
<i>Resonance</i>	Controls the resonance of the filter

DELAY


<i>Sync</i>	Selects the range of the Time knob (% or synced)
<i>Time</i>	Controls the time between each repetitions
<i>Feedback</i>	Controls the amount of repetitions
<i>Wet</i>	Controls the amount of Delay signal

CRUSHER

<i>Bits</i>	Reduces the bit-depth of the sound causing distortion
<i>Downsample</i>	Reduces the samplerate frequency causing aliasing

STEP SEQUENCER




You can show/hide the Sequencer by clicking on the  icon next to the presets box.

Each track in the step sequencer can be enabled or disabled by clicking on the parameter names on the left. Each track can also be randomized using the dice buttons on the right.

You can change the amount of steps by clicking on the  icon.

FEATURES

You can access the MIDI Learn and Randomizer menu by right-clicking on any parameter in the interface.



MIDI LEARN

You can assign your hardware MIDI controller to any parameter in miniBit. Right-click on the parameter you'd like to control, and select *Learn...* then move the knob or slider on your MIDI controller which you'd like to use.

miniBit will detect the MIDI CC number of that particular control, and link it automatically to the selected parameter.

RANDOMIZER

It is possible to randomize all the parameters in the interface by clicking on the Random button in the top bar.

<i>Lock/Unlock Random</i>	Decides if the parameter can be randomized
<i>Lock All</i>	No parameters will be randomized
<i>Unlock All</i>	All parameters will be randomized

By clicking on the  icon you can access additional features.

GLOBAL VOLUME BOOST

You can increase the overall volume of miniBit up to +12dB. Be carefull as this is a *global setting*. All presets and also previous saved projects will be affected by this!

SEQUENCER STEPS

You can change the number of steps for the step sequencer (default 8 steps). This can be useful if you want to sync the sequencer to an odd tempo.

PITCH BEND RANGE

You can change the range of the pitch bend, indipendently for up and down bending, up to 12 semitones.

VELOCITY

You can disable the velocity if you want to play each note at the same volume. You can also change the curve of the velocity, from soft to hard. If your MIDI controller has a velocity curve option, we recommend to use that and leave miniBit setting to *Linear*.

PRESET COPY/PASTE

You can easily share presets by using this Copy/Paste feature instead of sharing the actual preset file.

By clicking on *Copy to Clipboard*, the status of all parameters will be saved to the Clipboard.

By clicking on *Paste from Clipboard* instead, you can load a preset shared using the previous function.

WINDOW SIZE

You can resize the plugin window using three predefined sizes (*small, standard, big*). You can also resize the plugin window by clicking and dragging the bottom-right corner of the interface. Double clicking will reset to the *standard* size.

END

WHERE IS EVERYTHING?

The installer will place the plugins, presets and other data in these folders.

MAC OS

AU: */Library/Audio/Plug-ins/Components/*
VST: */Library/Audio/Plug-ins/VST/*
VST3: */Library/Audio/Plug-ins/VST3/*
AAX: */Library/Application Support/Avid/Audio/Plug-Ins/*
Data: */Users/Shared/AudioThing/*

WINDOWS

VST: *custom path from installer*
VST3: *\Program Files\Common Files\VST3*
AAX: *\Program Files\Common Files\Avid\Audio\Plug-Ins*
Data: *\Users\Public\Public Documents\AudioThing*

CREDITS

DSP & Code: Carlo Castellano
Design: John Gordon (vstyler)

EULA

Please visit www.audiothing.net/eula/ to review this product EULA.

THANK YOU

Thank you for your purchase! We hope you will have as much fun using it as we had making this product.

For help or any question, feel free to contact us here: www.audiothing.net/contact/

